


Caracteristici tehnice <i>Technical Data</i>	Simbolizare <i>Symbol</i>	UM <i>MU</i>	Valoare / <i>Value</i>											
tensiunea nominală <i>rated voltage</i>	$U_n$	kV	7,2											
curent nominal <i>rated current</i>	$I_n$	A	2,5	4	6,3	10	16	25	31,5	40	50	63	80	100
capacitatea de rupere la $\cos \varphi < 0,15$ <i>rated breaking capacity at <math>\cos \varphi &lt; 0,15</math></i>		kA	50											
curent minim de rupere <i>minimum breaking current</i>	$I_3$	A	7,5	12	20	31	52	96	125	200	250	300	550	650
puterea disipată <i>power loss</i>	P	W	4,5	7,2	9,4	18,7	20,9	21	24,6	32	39,7	40,9	45	55
masa/ <i>weight</i>	-	kg	1,1						2,3					
ambalare/ <i>packing</i>	-	-	individual , în cutie de carton <i>individually, in carton boxes</i>											

**SIMBOLIZARE /SYMBOL:**


Diametrul contactelor ( mm ) <i>Contact diameter (mm)</i>		45		56	
Prevăzută cu percutor / <i>With striker</i>		Da / <i>Yes</i>	Nu / <i>No</i>	Da / <i>Yes</i>	Nu / <i>No</i>
$I_n$ ( A )	2,5	<b>EPA-7,2-2,5</b>	<b>EA-7,2-2,5</b>	<b>EPB-7,2-2,5</b>	<b>EB-7,2-2,5</b>
	4	<b>EPA-7,2-4</b>	<b>EA-7,2-4</b>	<b>EPB-7,2-4</b>	<b>EB-7,2-4</b>
	6,3	<b>EPA-7,2-6,3</b>	<b>EA-7,2-6,3</b>	<b>EPB-7,2-6,3</b>	<b>EB-7,2-6,3</b>
	10	<b>EPA-7,2-10</b>	<b>EA-7,2-10</b>	<b>EPB-7,2-10</b>	<b>EB-7,2-10</b>
	16	<b>EPA-7,2-16</b>	<b>EA-7,2-16</b>	<b>EPB-7,2-16</b>	<b>EB-7,2-16</b>
	25	<b>EPA-7,2-25</b>	<b>EA-7,2-25</b>	<b>EPB-7,2-25</b>	<b>EB-7,2-25</b>
	31,5	<b>EMPA-7,2-31,5</b>	<b>EMA-7,2-31,5</b>	<b>EMPB-7,2-31,5</b>	<b>EMB-7,2-31,5</b>
	40	<b>EMPA-7,2-40</b>	<b>EMA-7,2-40</b>	<b>EMPB-7,2-40</b>	<b>EMB-7,2-40</b>
	50	<b>EMPA-7,2-50</b>	<b>EMA-7,2-50</b>	<b>EMPB-7,2-50</b>	<b>EMB-7,2-50</b>
	63	<b>EMPA-7,2-63</b>	<b>EMA-7,2-63</b>	<b>EMPB-7,2-63</b>	<b>EMB-7,2-63</b>
80	<b>EMPA-7,2-80</b>	<b>EMA-7,2-80</b>	<b>EMPB-7,2-80</b>	<b>EMB-7,2-80</b>	
100	<b>EMPA-7,2-100</b>	<b>EMA-7,2-100</b>	<b>EMPB-7,2-100</b>	<b>EMB-7,2-100</b>	

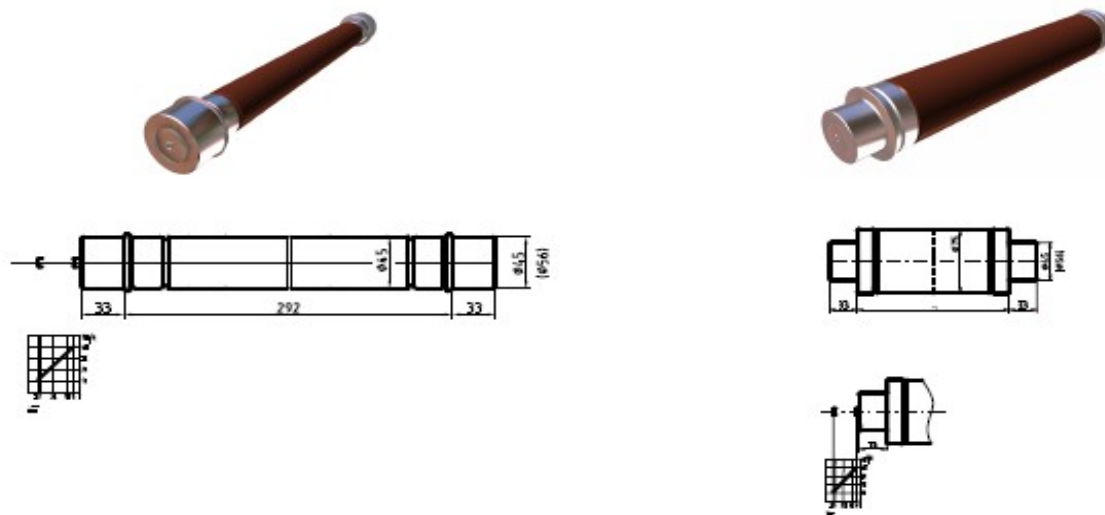

Caracteristici tehnice <i>Technical Data</i>	Simbolizare <i>Symbol</i>	UM <i>MU</i>	Valoare / <i>Value</i>												
tensiunea nominală <i>rated voltage</i>	$U_n$	kV	12												
curent nominal <i>rated current</i>	$I_n$	A	2,5	4	6,3	10	16	25	31,5	40	50	63	80	100	
capacitatea de rupere la cos $\varphi < 0,15$ <i>rated breaking capacity at cos <math>\varphi &lt; 0,15</math></i>		kA	40												
curent minim de rupere <i>minimum breaking current</i>	$I_b$	A	7,5	12	20	31	52	96	125	200	250	300	550	650	
puterea disipată <i>power loss</i>	P	W	8	11,4	16,5	30,9	34,1	37	40,6	53,6	63,2	71,9	72,5	91	
masa / <i>weight</i>	-	kg	1,6						3,9						
ambalare / <i>packing</i>	-	-	individual, în cutie de carton / <i>individually in carton boxes</i>												

SIMBOLIZARE / *SYMBOL*

Diametrul contactelor ( mm ) <i>Contact diameter ( mm )</i>		45		56	
Prevăzută cu percutor / <i>With striker</i>		Da / <i>Yes</i>	Nu / <i>No</i>	Da / <i>Yes</i>	Nu / <i>No</i>
$I_n$ ( A )	2,5	EPA-12-2,5	EA-12-2,5	EPB-12-2,5	EB-12-2,5
	4	EPA-12-4	EA-12-4	EPB-12-4	EB-12-4
	6,3	EPA-12-6,3	EA-12-6,3	EPB-12-6,3	EB-12-6,3
	10	EPA-12-10	EA-12-10	EPB-12-10	EB-12-10
	16	EPA-12-16	EA-12-16	EPB-12-16	EB-12-16
	25	EPA-12-25	EA-12-25	EPB-12-25	EB-12-25
	31,5	EMPA-12-31,5	EMA-12-31,5	EMPB-12-31,5	EMB-12-31,5
	40	EMPA-12-40	EMA-12-40	EMPB-12-40	EMB-12-40
	50	EMPA-12-50	EMA-12-50	EMPB-12-50	EMB-12-50
	63	EMPA-12-63	EMA-12-63	EMPB-12-63	EMB-12-63
	80	EMPA-12-80	EMA-12-80	EMPB-12-80	EMB-12-80
100	EMPA-12-100	EMA-12-100	EMPB-12-100	EMB-12-100	

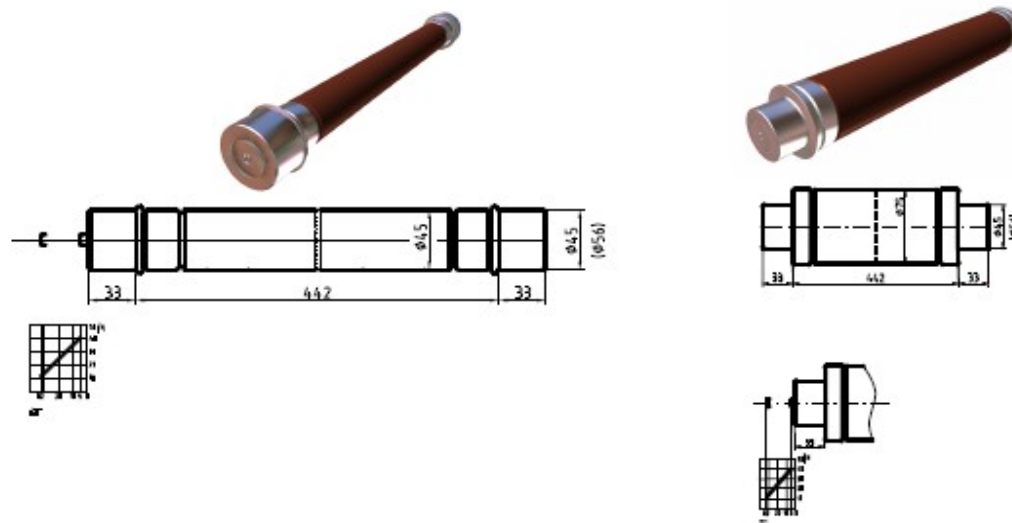

Caracteristici tehnice Technical Data	Simbolizare Symbol	UM MU	Valoare / Value												
tensiunea nominală rated voltage	$U_n$	kV	24												
curent nominal rated current	$I_n$	A	2,5	4	6,3	10	16	25	31,5	40	50	63	80	100	
capacitatea de rupere la cos $\varphi < 0,15$ rated breaking capacity at cos $\varphi < 0,15$		kA	31,5												
curent minim de rupere minimum breaking current	$I_3$	A	7,5	12	20	31	52	96	125	200	250	300	550	650	
puterea disipată power loss	P	W	19,5	29,6	33,7	71,2	75,2	81,2	83,1	129,1	147,5	151,9	153,2	190	
masa /weight	-	kg	1,8						4,5						
ambalare / packing	-	-	individual , în cutie de carton / individually in carton boxes												

## SIMBOLIZARE / SYMBOL:

Diametrul contactelor ( mm ) Contact diameter (mm)		45		56	
Prevăzută cu percutor / With striker		Da /Yes	Nu /No	Da /Yes	Nu /No
$I_n$ ( A )	2,5	EPA-24-2,5	EA-24-2,5	EPB-24-2,5	EB-24-2,5
	4	EPA-24-4	EA-24-4	EPB-24-4	EB-24-4
	6,3	EPA-24-6,3	EA-24-6,3	EPB-24-6,3	EB-24-6,3
	10	EPA-24-10	EA-24-10	EPB-24-10	EB-24-10
	16	EPA-24-16	EA-24-16	EPB-24-16	EB-24-16
	25	EPA-24-25	EA-24-25	EPB-24-25	EB-24-25
	31,5	EMPA-24-31,5	EMA-24-31,5	EMPB-24-31,5	EMB-24-31,5
	40	EMPA-24-40	EMA-24-40	EMPB-24-40	EMB-24-40
	50	EMPA-24-50	EMA-24-50	EMPB-24-50	EMB-24-50
	63	EMPA-24-63	EMA-24-63	EMPB-24-63	EMB-24-63
80	EMPA-24-80	EMA-24-80	EMPB-24-80	EMB-24-80	
100	EMPA-24-100	EMA-24-100	EMPB-24-100	EMB-24-100	